



THE BROADCAST SHOP.com

When printing, be sure to set "Page Scaling" to "None".
(otherwise it will resize this page and thus cause the cutting templates to be off)

For Fixed Frequency systems (Lectrosonics 190/195 systems),
you can cut the antenna halfway in between Blocks 21 & 22
and that will serve as a good range for those systems.



REMOTE AUDIO BNC ANTENNA

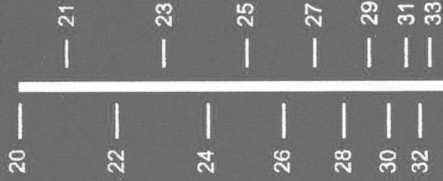


BLOCK LEGEND (LECTROSONICS STANDARD)


BL	FREQ RANGE	COLOR
20	512.000 - 537.500	BLACK
21	537.500 - 563.100	BROWN
22	563.200 - 588.700	RED
23	588.800 - 614.300	ORANGE
24	614.400 - 639.000	YELLOW
25	640.000 - 665.500	GREEN
26	665.600 - 691.100	BLUE
27	691.200 - 716.700	PINK
28	716.800 - 742.300	GREY
29	742.400 - 767.900	WHITE
30	768.000 - 793.500	BLACK
31	793.600 - 819.100	BLACK
32	819.200 - 844.700	BLACK
33	844.800 - 869.000	BLACK

CUT WHIP
TO LENGTH
INDICATED
FOR THE
FREQUENCIES
LISTED IN
LEGEND

615-256-3513
remoteaudio.com



REMOTE AUDIO BNC-R/A ANTENNA

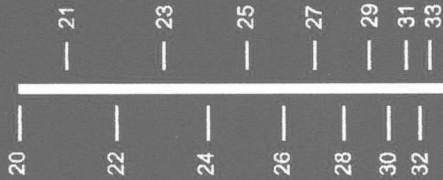


BLOCK LEGEND (LECTROSONICS STANDARD)


BL	FREQ RANGE	COLOR
20	512.000 - 537.500	BLACK
21	537.500 - 563.100	BROWN
22	563.200 - 588.700	RED
23	588.800 - 614.300	ORANGE
24	614.400 - 639.000	YELLOW
25	640.000 - 665.500	GREEN
26	665.600 - 691.100	BLUE
27	691.200 - 716.700	PINK
28	716.800 - 742.300	GREY
29	742.400 - 767.900	WHITE
30	768.000 - 793.500	BLACK
31	793.600 - 819.100	BLACK
32	819.200 - 844.700	BLACK
33	844.800 - 869.000	BLACK

CUT WHIP
TO LENGTH
INDICATED
FOR THE
FREQUENCIES
LISTED IN
LEGEND

615-256-3513
remoteaudio.com



REMOTE AUDIO SMA-R/A ANTENNA


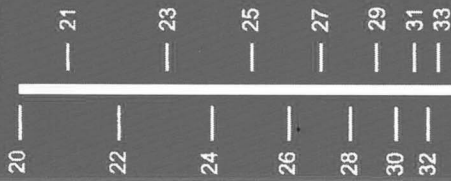


BLOCK LEGEND (LECTROSONICS STANDARD)


BL	FREQ RANGE	COLOR
20	512.000 - 537.500	BLACK
21	537.500 - 563.100	BROWN
22	563.200 - 588.700	RED
23	588.800 - 614.300	ORANGE
24	614.400 - 639.000	YELLOW
25	640.000 - 665.500	GREEN
26	665.600 - 691.100	BLUE
27	691.200 - 716.700	PINK
28	716.800 - 742.300	GREY
29	742.400 - 767.900	WHITE
30	768.000 - 793.500	BLACK
31	793.600 - 819.100	BLACK
32	819.200 - 844.700	BLACK
33	844.800 - 869.000	BLACK

CUT WHIP
TO LENGTH
INDICATED
FOR THE
FREQUENCIES
LISTED IN
LEGEND

615-256-3513
remoteaudio.com



REMOTE AUDIO SMA ANTENNA

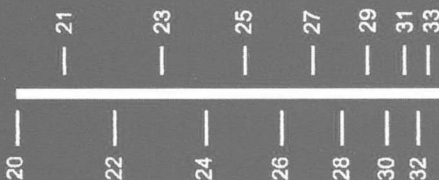

BLOCK LEGEND (LECTROSONICS STANDARD)

BL	FREQ RANGE	COLOR
20	512.000 - 537.500	BLACK
21	537.500 - 563.100	BROWN
22	563.200 - 588.700	RED
23	588.800 - 614.300	ORANGE
24	614.400 - 639.000	YELLOW
25	640.000 - 665.500	GREEN
26	665.600 - 691.100	BLUE
27	691.200 - 716.700	PINK
28	716.800 - 742.300	GREY
29	742.400 - 767.900	WHITE
30	768.000 - 793.500	BLACK
31	793.600 - 819.100	BLACK
32	819.200 - 844.700	BLACK
33	844.800 - 869.000	BLACK

CUT WHIP
TO LENGTH
INDICATED
FOR THE
FREQUENCIES
LISTED IN
LEGEND

615-256-3513
remoteaudio.com

